
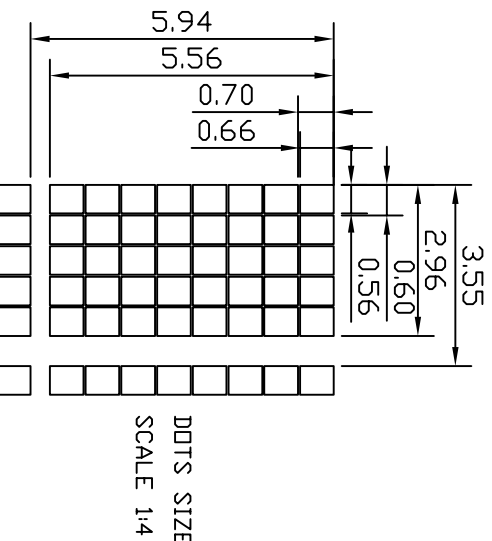


47X25MM Protective film sticker sheet

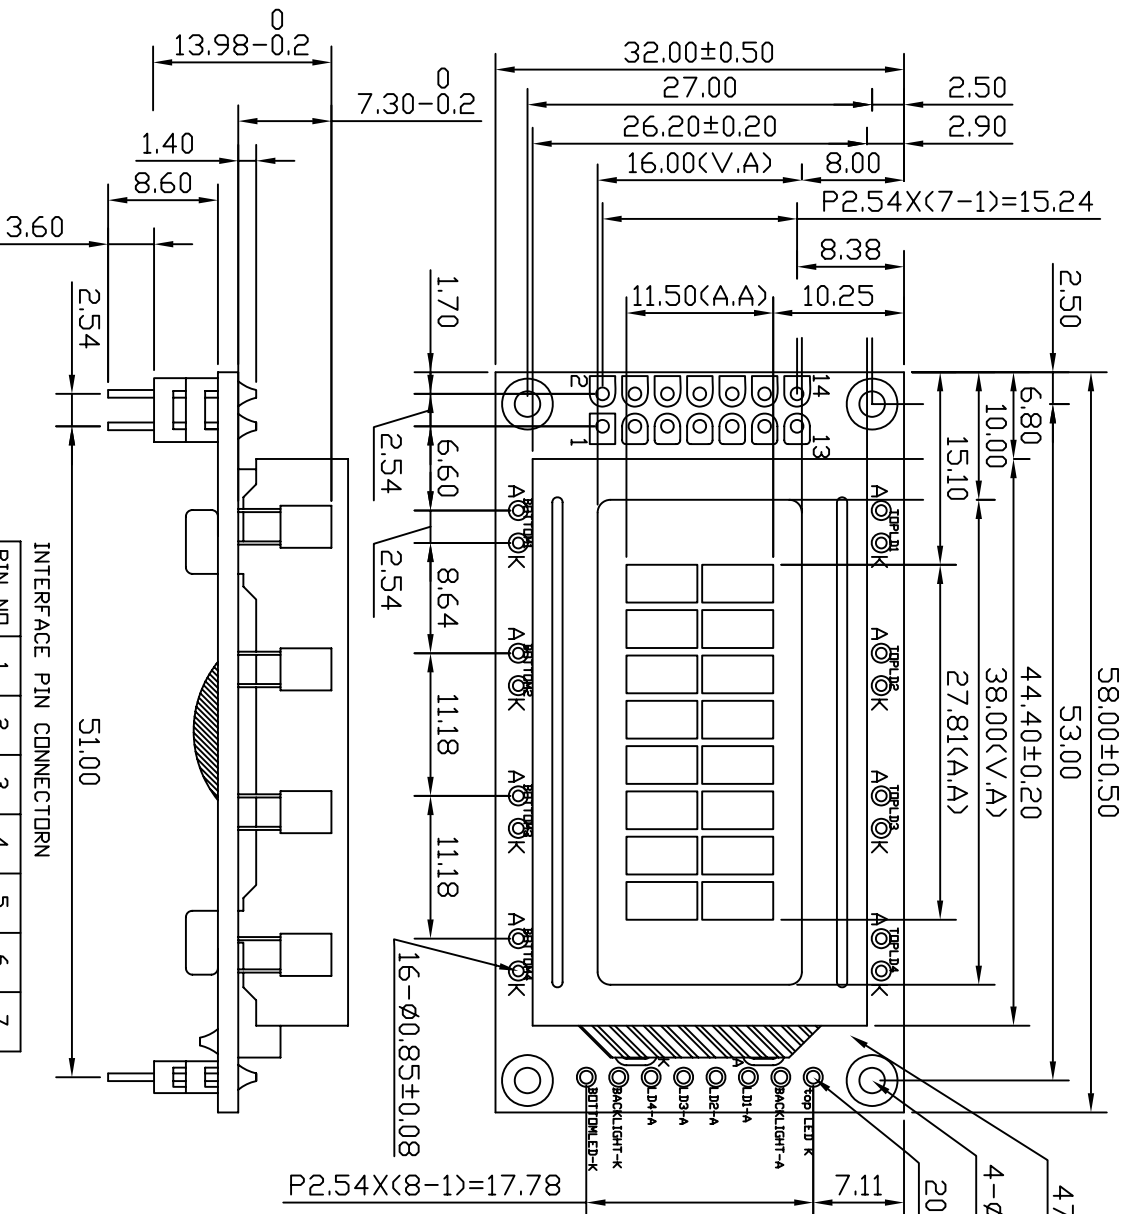

INTERFACE PIN CONNECTOR

PIN NO	1	2	3	4	5	6	7
SYMBOL	VSS	VDD	V0	RS	R/W	E	DB0
PIN NO	8	9	10	11	12	13	14
SYMBOL	DB1	DB2	DB3	DB4	DB5	DB6	DB7

Lcd Type	<input type="checkbox"/> TN	<input type="checkbox"/> HTN	<input checked="" type="checkbox"/> STN	<input type="checkbox"/> FSTN
Lcd backround	<input checked="" type="checkbox"/> Positive	<input type="checkbox"/> Negative	<input type="checkbox"/> Yellowgreen	<input type="checkbox"/> White/Black
Polarizer	<input type="checkbox"/> Gray	<input type="checkbox"/> Blue	<input checked="" type="checkbox"/> Reflective	<input type="checkbox"/> Transmissive
View Angle	<input type="checkbox"/> 0° Clock	<input type="checkbox"/> 6° Clock	<input type="checkbox"/> 9° Clock	<input checked="" type="checkbox"/> 12° Clock
Operating TEMP	<input type="checkbox"/> 0 to +50° C	<input type="checkbox"/> -10 to +60° C	<input type="checkbox"/> -20 to +70° C	<input type="checkbox"/> Other
Storage TEMP	<input type="checkbox"/> -10 to +60° C	<input type="checkbox"/> -20 to +70° C	<input type="checkbox"/> -30 to +80° C	<input type="checkbox"/> Other
Back Light	<input checked="" type="checkbox"/> Yellowgreen	<input type="checkbox"/> White	<input type="checkbox"/> ORANGE	<input type="checkbox"/> Blue
Drive Method	VDD:5.0V VLED:4.2V Vop:5.0V Bias:1/5 Duty:1/16			
Connector/IC	ZEBRA / SPLC780C-03			
RoHS	<input checked="" type="checkbox"/> YES	<input type="checkbox"/> NO	<input type="checkbox"/> B	
Ultimately Tolerance	<input type="checkbox"/> A	<input type="checkbox"/> B		

TOLERANCE GRAD(EAF) B

-6	0.1	0.2
6-18	0.2	0.3
18-50	0.25	0.4
50-180	0.4	0.5
180-	0.5	1.0

DMG: Y0Y0 07/5/22

UPTECH LTD 深圳市华视界光电有限公司

CUSTOMER PART NO.

MODULE

SCALE: 1:1

Visual Angle

UP-C82A*

PART NAME: LCM

Material NO.

DRAWING NO.

SHEET 1 OF 1