



REV	REVISION RECORD	Date	Name
A	NEW RELEASE	07-29-05	YAN
B	1L Dimax改为12.1umax	08-05-05	YAN
C	1umax改为9.5um	08-25-05	YAN

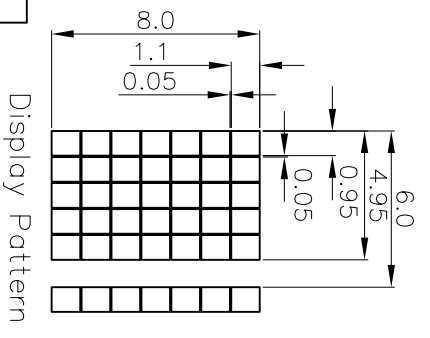

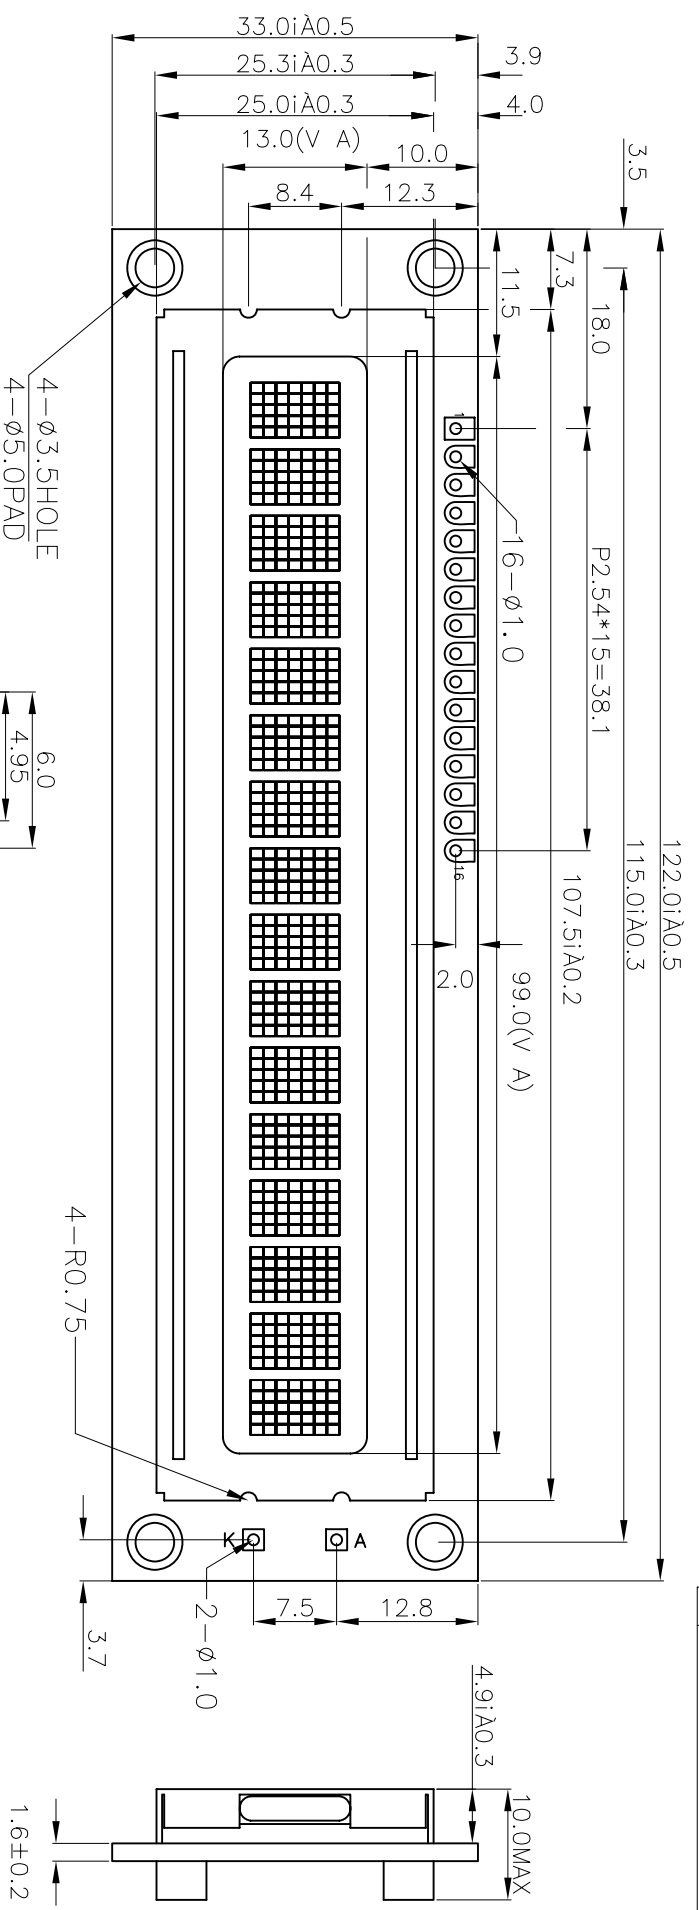

INTERFACE PIN CONNECTOR

PIN NO	1	2	3	4	5	6	7 to 14	15	16
SYMBOL	GND	VDD	VO	RS	R/W	E	DB0toDB7	A	K

LCD Type	<input type="checkbox"/> TN	<input checked="" type="checkbox"/> HTN	<input type="checkbox"/> STN	<input type="checkbox"/> FSTN
Display Mode	<input checked="" type="checkbox"/> Positive	<input type="checkbox"/> Negative		
LCD Background	<input checked="" type="checkbox"/> Gray	<input type="checkbox"/> Blue	<input type="checkbox"/> Yellow/Green	<input type="checkbox"/> White/Black
Polarizer	<input checked="" type="checkbox"/> Reflective	<input type="checkbox"/> Transflective	<input type="checkbox"/> Transmissive	
View Angle	<input type="checkbox"/> 3 0' Clock	<input checked="" type="checkbox"/> 6 0' Clock	<input type="checkbox"/> 9 0' Clock	<input type="checkbox"/> 12 0' Clock
Operating TEMP	<input checked="" type="checkbox"/> 0 to +50° C	<input type="checkbox"/> -10 to +60° C	<input type="checkbox"/> -20 to +70° C	<input type="checkbox"/> Other
Storage TEMP	<input checked="" type="checkbox"/> -10 to +60° C	<input type="checkbox"/> -20 to +70° C	<input type="checkbox"/> -30 to +80° C	<input type="checkbox"/> Other
Drive Method	VOP: 4.4V	VDD: 5.0V	Bias: 1/4	Duty: 1/16
Back Light	<input type="checkbox"/> Amber	<input type="checkbox"/> Blue	<input type="checkbox"/> Green	<input type="checkbox"/> White
LCD Control IC	SPLC780D-001A			
Connector	ZEBRA			
ROHS	<input checked="" type="checkbox"/> YES	<input type="checkbox"/> NO		
Ultimately Tolerance	<input type="checkbox"/> A	<input checked="" type="checkbox"/> B		

TOLERANCE GRADE(±)	A	B
-6	0.1	0.2
6-18	0.2	0.3
18-50	0.25	0.4
50-180	0.4	0.5
180-	0.5	1.0

DWG: LDX 07-11-15	 深圳市华视界光电有限公司 Shenzhen Vsky Optoelectronics CO., LTD	PART NO.
CHK:		LCM
APPD:	CLIENTELE MODULE:	Material NO.
SCALE: 1:1	MOULE: UP-C161B*	DWG NO. M0507003C
DIM: MM	Visual Angle: 	SHEET 1 OF 1