


PIN	SYMBOL
1	VSS
2	VDD
3	V0
4	RS
5	R/W
6	E
7	DB0
8	DB1
9	DB2
10	DB3
11	DB4
12	DB5
13	DB6
14	DB7
15	NC
16	NC

NOTE:

1. LCD Display Type: STN/Gray
2. Polarizer Mode: Reflective/Positive
3. Drive Method: 1/16duty, 1/5Bias
4. Viewing Direction: 6:00
5. Logic Supply Voltage: 5.0 V
6. LCD Driving Voltage: 4.5 V
7. Control IC: ST7066U-0A(SPLC780D-01)
8. Operating Temp: -20°C ~ 70°C
9. Storage Temp: -30°C ~ 80°C
10. Connector: ZEBRA
11. Utteriorly Tolerance: ±0.2
12. RoHS

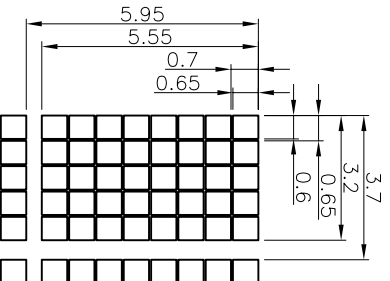

DWG: TD04	深圳市华视界光电有限公司		PART NAME: LCM
CHK:	CUSTOMER	Shenzhen Vsky Optoelectronics co., Ltd	Material NO.
APPD:	PART NO.		
SCALE: 1:1	MODULE	UP-C202G*	
UNIT: MM	Visual Angle		SHEET 1 OF 1