



REV	REVISION RECORD	Date	Name
A	NEW RELEASE	2005-1-25	YAN
B	MODIFY RENAME	2005-4-10	YAN
C	MODIFY 16.0 TO 15.8	2005-1-25	YAN

118.0±0.5 (A)

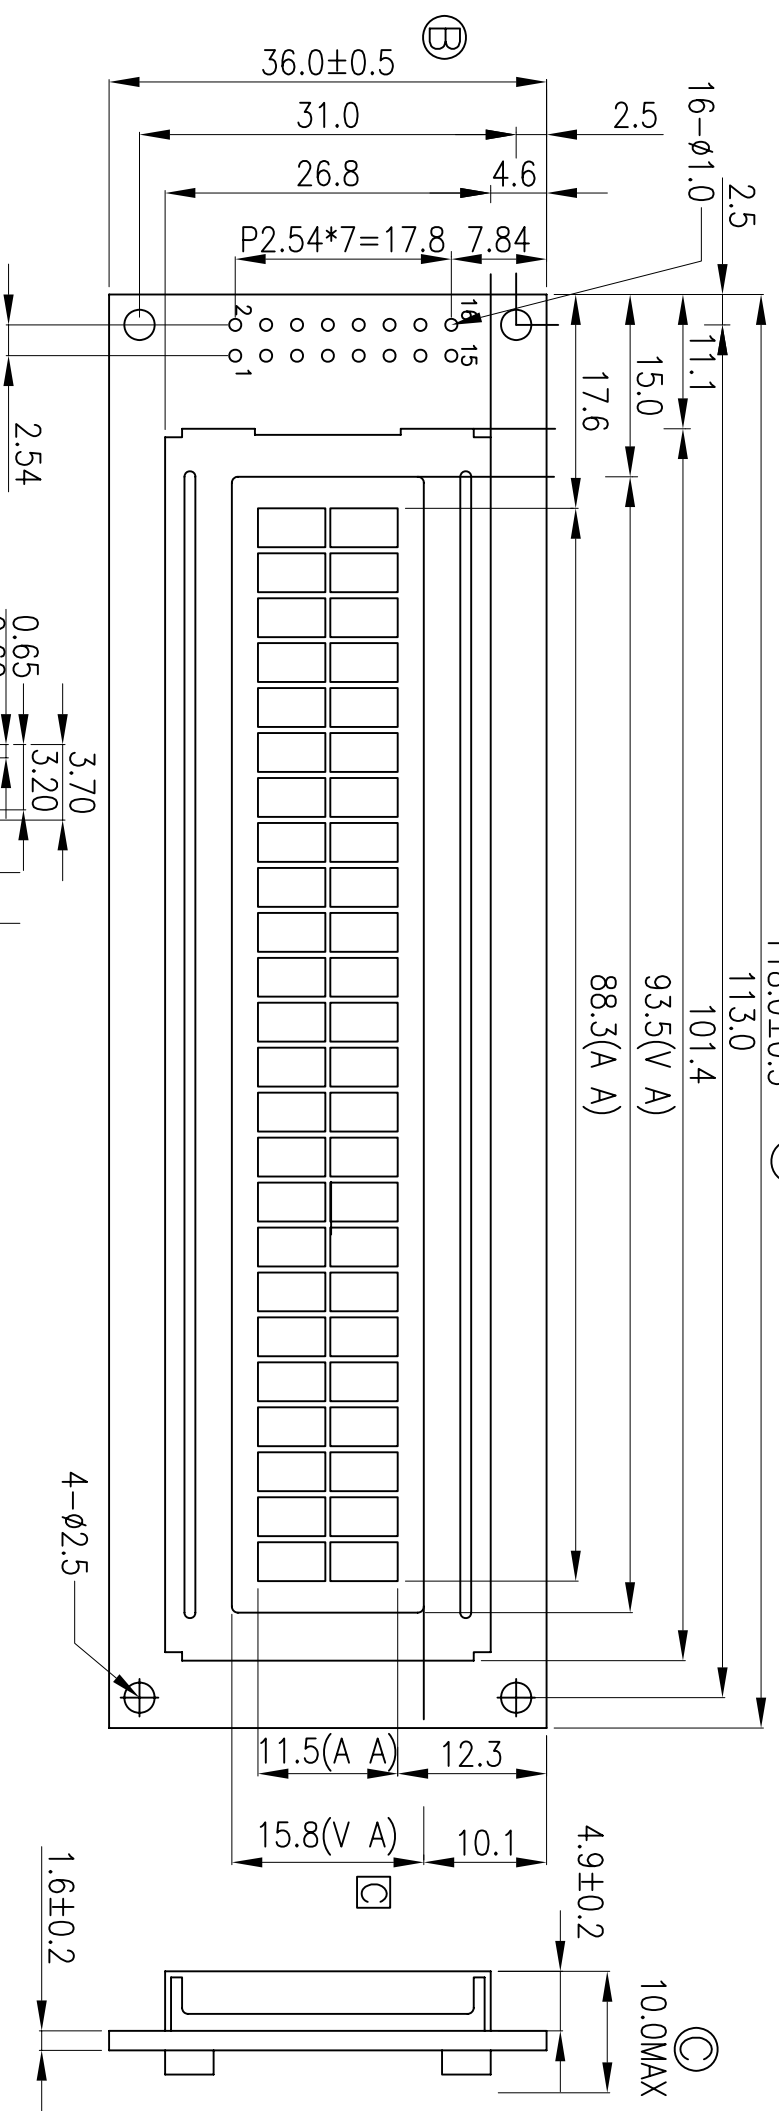

DISPLAY PATTEN



Pin Connections

PIN NO.	1	2	3	4	5	6	7	8
SIGNAL	VSS	VDD	VO	RS	R/	E	DB0	DB1
PIN NO.	9	10	11	12	13	14	15	16
SIGNAL	DB2	DB3	DB4	DB5	DB6	DB7	VLED	VSS

Type	<input type="checkbox"/> TN	<input checked="" type="checkbox"/> STN	<input type="checkbox"/> FSTN	<input type="checkbox"/> HTN
Mode	<input type="checkbox"/> YellowGreen	<input type="checkbox"/> WHITE/BLACK	<input checked="" type="checkbox"/> Gray	<input type="checkbox"/> Blue
POLARITY	<input checked="" type="checkbox"/> Positive	<input type="checkbox"/> Negative		
Polariser	<input checked="" type="checkbox"/> Reflective	<input type="checkbox"/> Transflective	<input type="checkbox"/> Transmissive	
View Angle	<input type="checkbox"/> 3 0' Clock	<input checked="" type="checkbox"/> 6 0' Clock	<input type="checkbox"/> 9 0' Clock	<input type="checkbox"/> 12 0' Clock
Operating Temp	0 to 50° C			
Storage Temp	-20 to 60° C			
Driving	VDD: 5.0V	Vop: 4.2V	Bias: 1/5	Duty: 1/16
LED COLOR	<input type="checkbox"/> YELLOW-GREEN	<input type="checkbox"/> BLUE	<input type="checkbox"/> WHITE	<input type="checkbox"/> AMBER
Tolerance Grade	<input checked="" type="checkbox"/> ±0.2	<input type="checkbox"/> ±0.3		

DWG: 韩小燕

CHK:

APPD:

SCALE: 1:1

DIM: MM

深圳市华视界光电有限公司  
UPTECH LTD Shenzhen Vsky Optoelectronics CO., LTD

CUSTOMER MODULE:

MODULE: UP-C242A\*

Visual Angle:

PART NO. LCM

Material NO. XX-XXX-XX

DWG NO. M0507004C

SHEET 1 OF 1