

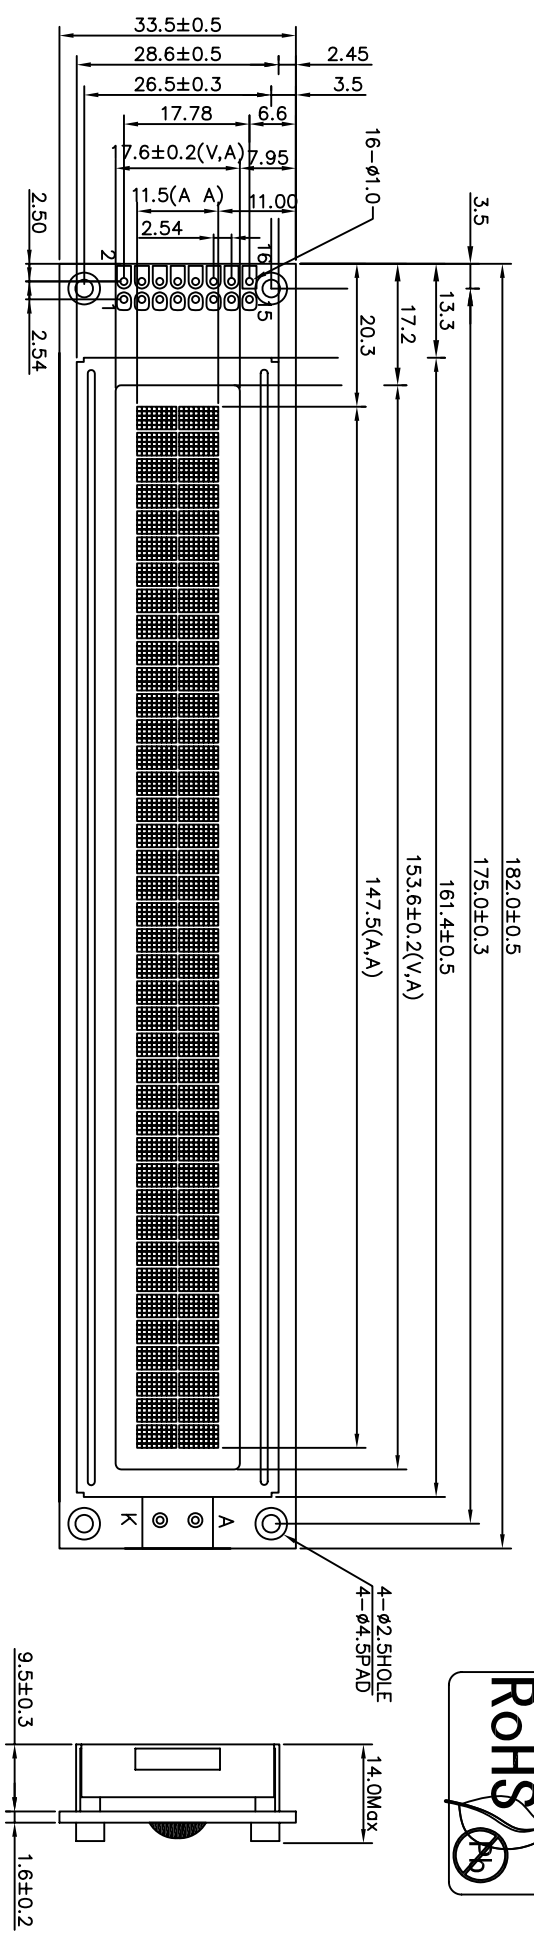


REV/REVISION RECORD	DATE	NAME
A NEW RELEASE	07-27-05	KING
B Warrent LED modify LCM	08-05-05	KING
C Modify 164.0x28.8 to 161.4x28.6	08-11-05	KING
D Modify 9.1 to 9.5	09-06-05	KING
E Update Frame	10-10-22	CGP



PIN NO.	1	2	3	4	5	6	7	8	9	10
SYMBOL	GND	VDD	VO	RS	R/W	E	DB0	DB1	DB2	DB3
PIN NO.	11	12	13	14	15	16	---	---	---	---
SYMBOL	DB4	DB5	DB6	DB7	A	K	---	---	---	---

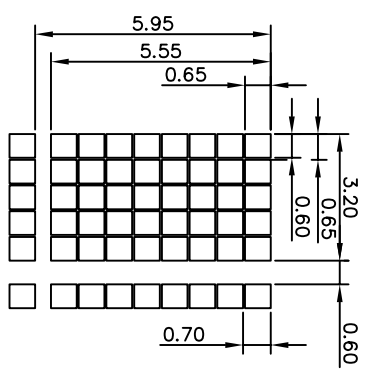

客户确认签名
Customer approved
Date:

NOTE:

1. LCD Display Type: STN/Y-G
2. Polarizer Mode: Transflective/Positive
3. Drive Method: 1/16Duty, 1/5Bias
4. Viewing Direction: 6:00
5. Logic Supply Voltage: 5.0 V
6. LCD Driving Voltage: 4.7 V
7. Operating Temp: 0°C ~ 50°C
8. Storage Temp: -10°C ~ 60°C
9. Drive IC: SPLC780D-01
10. Backlight Type: LED, YellowGreen, 4.2V
11. Connector: ZEBRA
12. Ulteriorly Tolerance: ±0.2
13. RoHS

TOLERANCE GRADE(±)		A	B
-6	0.1	0.2	
6-18	0.2	0.3	
18-50	0.25	0.4	
50-180	0.4	0.5	
180-	0.5	1.0	

DWG: TD04	CHK:	UPTECH	深圳市华视界光电有限公司	PART NAME: LCM
CHK:	CUSTOMER	Shenzhen Vsky Optoelectronics co., Ltd	Material NO.	
APPD:	PART NO.			
DIM: MM	MODULE	UP-C402A*	SCALE: 1:1	
	Visual Angle			SHEET 1 OF 1